



# OVERLOCKER THREADING

To quickly change spools, tie the end of a new thread to one of the currently threaded spools, and pull it to draw the new thread through the machine, following the steps below:

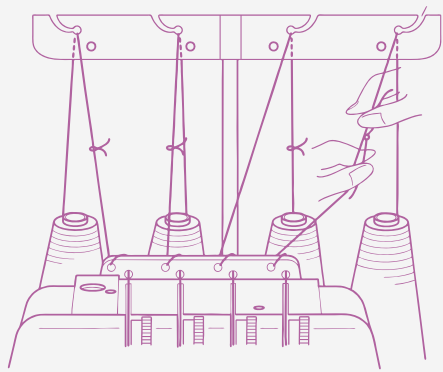


1. Cut the previous threads near the spool and then remove them.


2. Place the new spools on the overlocker and draw the threads through the telescope and then tie the thread ends together.

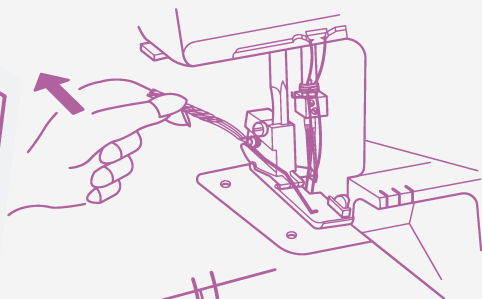

3. Raise the presser foot, gently draw the threads until the knots reach the needle eyes. Cut the knots from needle threads and manually thread the needles. Then continue drawing the threads to the back of the machine until the knots are clear of the loopers.

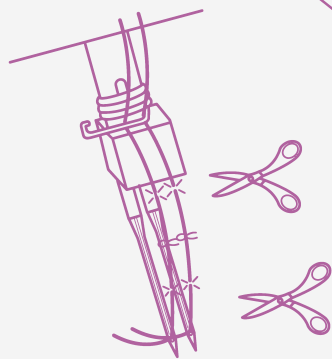

4. Before starting sewing, clear the needle threads from under the presser foot in the direction (A), ensuring that they are not caught below the needle plate. Then pull out the threads to the back approximately 10 cm (4") away from the presser foot. Lower the presser foot, and you are now ready to sew.

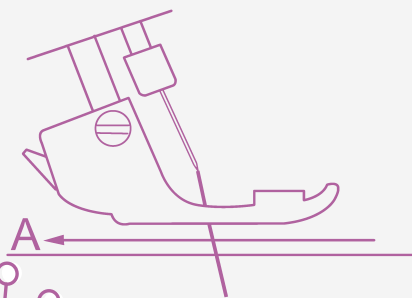

NOTE: Turn off the power switch before threading the machine.

